


GAN 70W


BS8546 approved 70W travel adapter with GaN III Tech, 4 USB-C ports and 1 USB-A port



Spec	
Dimensions	69 x 55.5 x 54.5 mm
Materials	Flame retardant PC, Copper, GaN
Weight	197g plug only - 241g plug in case
Plug type	UK, Europe, USA, Australia, Africa
Accepts plugs	Type A, B, C, E, F, G, I, J, L, N.
Plugs into	Type A, B, C, D, E, F, G, H, I, J, K, L, N, O.
AC input	100V-250V~, 50/60Hz, 1.8A
Ratings	100-250V~, 10A max, 2500W max
DC Output	70.0W
USB specification	See bottom of spec sheet

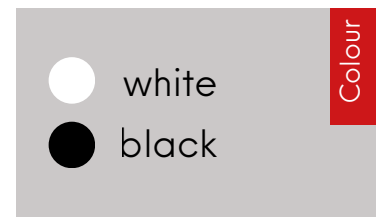

Branding	Subject to sight of artwork
1-4 colour pad / full colour digital	Below multi socket - 35 (w) x 15 (h) mm
1-4 colour pad / full colour digital	Top of plug - 30 (w) x 30 (h) mm
1 colour pad print	Case - 45 (w) x 30 (h) mm

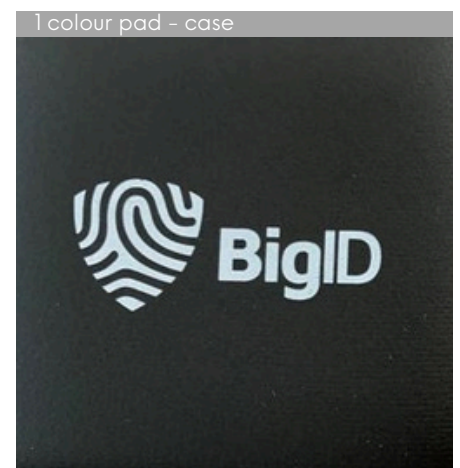



Packaging	
Product packaging	Black EVA zip hard case, kraft tuck box
EVA case dimensions	90 x 85 x 70 mm
Tuck box dimensions	95 x 85 x 75 mm
Carton dimensions	50.5 x 40.5 x 19 cm
No. per carton	50
GW	14kg
HS code	8536699099
Country of origin	China
Max no. per pallet	2100

Lead time	Approximate from artwork approval
1 - 4 colour pad print	7 - 10 days
Full colour digital print	10 - 12 days



Compliance



COMPATIBLE COUNTRIES

EU PLUG:

Albania	Cyprus	Israel	Oman
Algeria	Denmark	Italy	Pakistan
Angola	Djibouti	Kazakhstan	Paraguay
Argentina	Egypt	Korea	Peru
Austria	El Salvador	Kuwait	Philippines
Azores	Equatorial	Laos	Poland
Balearic Islands	Guinea Eritrea	Lebanon	Portugal
Bangladesh	Faeroe Islands	Lithuania	Romania
Belgium	Finland	Luxembourg	Russia
Bolivia	France	Macedonia	Rwanda
Bosnia	Gabon	Madagascar	Senegal
Brazil	Germany	Madeira	Somalia
Bulgaria	Gibraltar	Mali	Spain
Burkina Faso	Greece	Martinique	Sudan
Burundi	Greenland	Mauritania	Suriname
Cameroon	Guadeloupe	Mauritius	Sweden
Canary Island	Guinea	Monaco	Switzerland
Cape Verde	Guinea-Bissau	Morocco	Syria
Central African Republic	Hungary	Mozambique	Thailand
Channel Islands	Iceland	Myanmar	Togo
Chile	India	Nepal	Tunisia Turkey
Comoros	Indonesia	Netherlands	Uruguay
Congo	Niger	Norway	Vietnam
Croatia Cote d' Ivoire	Iraq		Zambia

AUS PLUG:

American Samoa
Argentina
Australia
China
El Salvador
Fiji
Guatemala
Kiribati
Nauru
New Zealand
Panama
Papua New Guinea
St. Vincent
Tajikistan
Tonga
Uruguay

USA PLUG:

American Samoa
Anguilla
Antilles
Aruba
Bahamas
Bangladesh
Barbados
Bermuda
Bolivia
Brazil
Cambodia
Canada
Cayman Islands
China
Colombia
Costa Rica
Cuba
Ecuador
El Salvador
Guam
Guatemala
Guyana
Haiti
Honduras

Japan
Jamaica
Laos
Lebanon
Liberia
Maldives
Mexico
Micronesia
Montserrat
Netherlands
Nicaragua
Niger
Okinawa
Panama
Peru
Philippines
Puerto Rico
St. Vincent
Saudi Arabia
Tahiti
Taiwan
Thailand
United States
Venezuela

UK PLUG:

Bahrain	Malawi
Bangladesh	Malaysia
Belize	Maldives
Botswana	Malta
Brunei	Mauritius
Cameroon	Myanmar
Channel Islands	Nigeria
Cyprus	Qman
Dominica El	Qatar
Salvador	St. Lucia
Gambia	St. Vincent
Ghana	Saudi Arabia
Gibraltar	Seychelles
Grenada	Sierra Leone
Guatemala	Singapore
Guyana	Tanzania
Hong Kong	Uganda
Iraq	United Arab Emirates
Ireland	United Kingdom
Isle of Man	Vietnam
Jordan	Yemen
Kuwait	Zambia
Lebanon	Zimbabwe
Macau	

USB Specification

Single port output mode	
USB-C1	5.0V = 3.0A 15W, 9.0V = 3.0A 27.0W, 12.0V = 3.0A 36.0W, 15.0V = 3.0A 45.0W, 20.0V = 3.5A 70.0W
USB-C2	5.0V = 3.0A 15W
USB-C3	5.0V = 3.0A 15W
USB-C4	5.0V = 3.0A 15W
USB-A1	5.0V = 2.4A 12W
Multi port output	
USB-C1	5.0V = 2.4A 12W, 9.0V = 3.0A 27.0W, 12.0V = 3.0A 36.0W, 15.0V = 3.0A 45.0W, 20.0V = 2.25A 45.0W
USB-C2	5.0V = 3.0A 15W
USB-C3	5.0V = 3.0A 15W
USB-C4	5.0V = 3.0A 15W
USB-A1	5.0V = 2.4A 12W